

**ACCENT**

# **SMARTBOARD**

Imaginez, Creez, Developpez, et Formez  
en toute simplicité



Display	65	65	75	86
Model	L65CB avec caméra	L65CB sans camera	CE75 GA	CE86 GA
Size	65inch	65inch	75inch	86inch
Panel Type	ADS	ADS	ADS	VA
Response Time	6ms	6ms	6ms	6ms
Aspect Ratio	16:9	16:9	16:9	16:9
Display Area	1428.48(H) 803.52(V)mm	1428.48(H) 803.52(V)mm	1649.664(H) 927.936(V)mm	1895.04(H) 10655.96(V)mm
Pixel Pitch	0.372×0.372mm	0.372×0.372mm	0.4296×0.4296mm	0.4935×0.4935mm
Resolution	3840(H)×2160(V)	3840(H)×2160(V)	3840(H)×2160(V)	3840(H)×2160(V)
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz
Display Color	1.07B(10bit)	1.07B(10bit)	1.07B(10bit)	1.07B(10bit)
NTSC	72%	72%	72%	72%
Contrast Ratio	1200:1	1200:1	1200:1	4000:1
Viewing Angle	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)
Back Light Unit	DLED	DLED	DLED	DLED
Brightness with glass(min)	300cd/m <sup>2</sup>	300cd/m <sup>2</sup>	300cd/m <sup>2</sup>	300cd/m <sup>2</sup>
Brightness with glass(typ)	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>	350cd/m <sup>2</sup>
Life Time	≥60000 Hours	≥60000 Hours	≤60000 Hours	≤60000 Hours

## Audio

Sound Channel	2.0	2.0	2.0	2.0
Speaker	2×16W	2×16W	2×16W	2×16W
Sound pressure level	89dB	89dB	89dB	89dB
Peak power	54W	54W	54W	54W

## Power

Power Requirements	100-240V~50 60Hz 3.5A	100-240V~50 60Hz 3.5A	100-240V~50 60Hz 3.5A	100-240V~50 60Hz 3.5A
Typical Power*[1]	190w	190w	190w	190w
Max Power*[2] (W/OPS)	325w	325w	325w	325w
Standby Power	≤0.5W	≤0.5W	≤0.5W	≤0.5W

## Microphone / Caméra

Quantity	6	×	×	×
Distance of a pickup	0~8m	×	×	×
Caméra	13 MP	×	×	×

I/O Port	65	65	75	86
HDMI IN	3	Up to 4K@60Hz, HDCP 2.1, CEC,ARC(HDMI 1)	3	3
HDMI OUT	1	Up to 4K@60Hz	1	1
USB 2.0	1		1	1
USB 3.0	4	Front×2, Onboard×2 3.0 can switch Android and OPS channels 2.0 can switch all channels	4	4
USB Type-C IN	1	Video,Audio,Touch,PD 65W, LAN Network Sharing	1	1
TOUCH 2.0	2	2.0	2	2
VGA IN	1	Up to 1080P@60Hz	1	1
AUDIO IN	1	3.5mm Phone Jack	1	1
AUDIO OUT	1	3.5mm Phone Jack	1	1
SPDIF	1	PCM output format	1	1
RS232	1	Baud rate 9600	1	1
RJ45 IN	1	10M/100M/1000Mbps	1	1
RJ45 OUT	1	10M/100M/1000Mbps	1	1

## Standard Module

Wireless Module	SI07B	SI07B	SI07B	SI07B
-----------------	-------	-------	-------	-------

Environmental Conditions	65	65	75	86
Operation Temperature	0°C~40°C	0°C~40°C	0°C~40°C	0°C~40°C
Operation Humidity	10%~90%RH	10%~90%RH	10%~90%RH	10%~90%RH
Storage Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
Storage Humidity	10%~90%RH	10%~90%RH	10%~90%RH	10%~90%RH
Altitude	Below 5000 meters	Below 5000 meters	Below 5000 meters	Below 5000 meters

Operating System	65	65	75	86
System Version	Android 11.0	Android 11.0	Android 11.0	Android 11.0
RAM	4G	4G	4G	4G
ROM	32G	32G	32G	32G
CPU	A55×4	A55×4	A55×4	A55×4
GPU	Mali G52MP2	Mali G52MP2	Mali G52MP2	Mali G52MP2

## Touch System


Sensing Type	Infrared recognition	Infrared recognition	Infrared recognition	Infrared recognition
Touch Tool	Passive infrared pen	Passive infrared pen	Passive infrared pen	Passive infrared pen
Accuracy	±1.5mm	±1.5mm	±1.5mm	±1.5mm
Touch Point	40 points touch	40 points touch	40 points touch	40 points touch
Minimum object size	2mm	3mm	3mm	3mm
Writing Height	≤1.5mm	≤1.5mm	≤1.5mm	≤1.5mm
Interpolation Resolution	32768(W)×32768(D)	32768(W)×32768(D)	32768(W)×32768(D)	32768(W)×32768(D)
System	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac OS X/Chrome	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac OS X/Chrome	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac OS X/Chrome	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac OS X/Chrome

## Accessories

Power Cord	×1	×1	×1	×1
Wall Mount	x1	x1	x1	x1
Writing Pen	×2	×2	×2	×2
HDMI Cable	x1	x1	x1	x1
USB Touch Cable ( type A-B)	x1	x1	x1	x1
Remote Control	x1	x1	x1	x1

## Specifications 65 avec caméra

Dimension L×H×D	1488×906×87mm
Dimension (package) L×W×H	1628×208×1014mm
Thickness of machine and wall mount	117mm (WIB9060G)
Wall-hanging Screw Spec	M8×25mm
VESA	600×400mm
Net Weight	36.85kg
Gross Weight	45.40kg

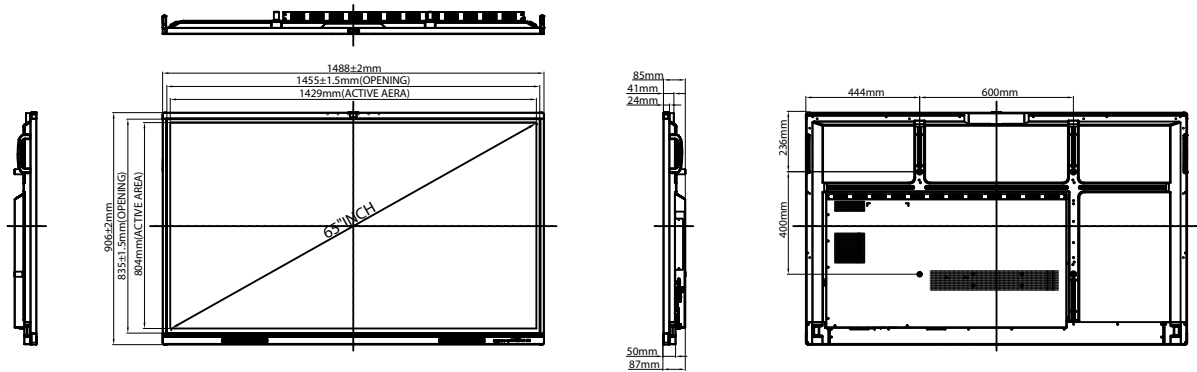

## Specifications 65 sans caméra

Dimension L×H×D 1488.4×896.6×87.2mm

Dimension (package) 1628×208×1005mm

L×W×H


Thickness of machine and wall mount 117mm (WIB9060G)

Wall-hanging Screw Spec M8×25mm

VESA 600×400mm


Net Weight 34.95kg

Gross Weight 44.70kg

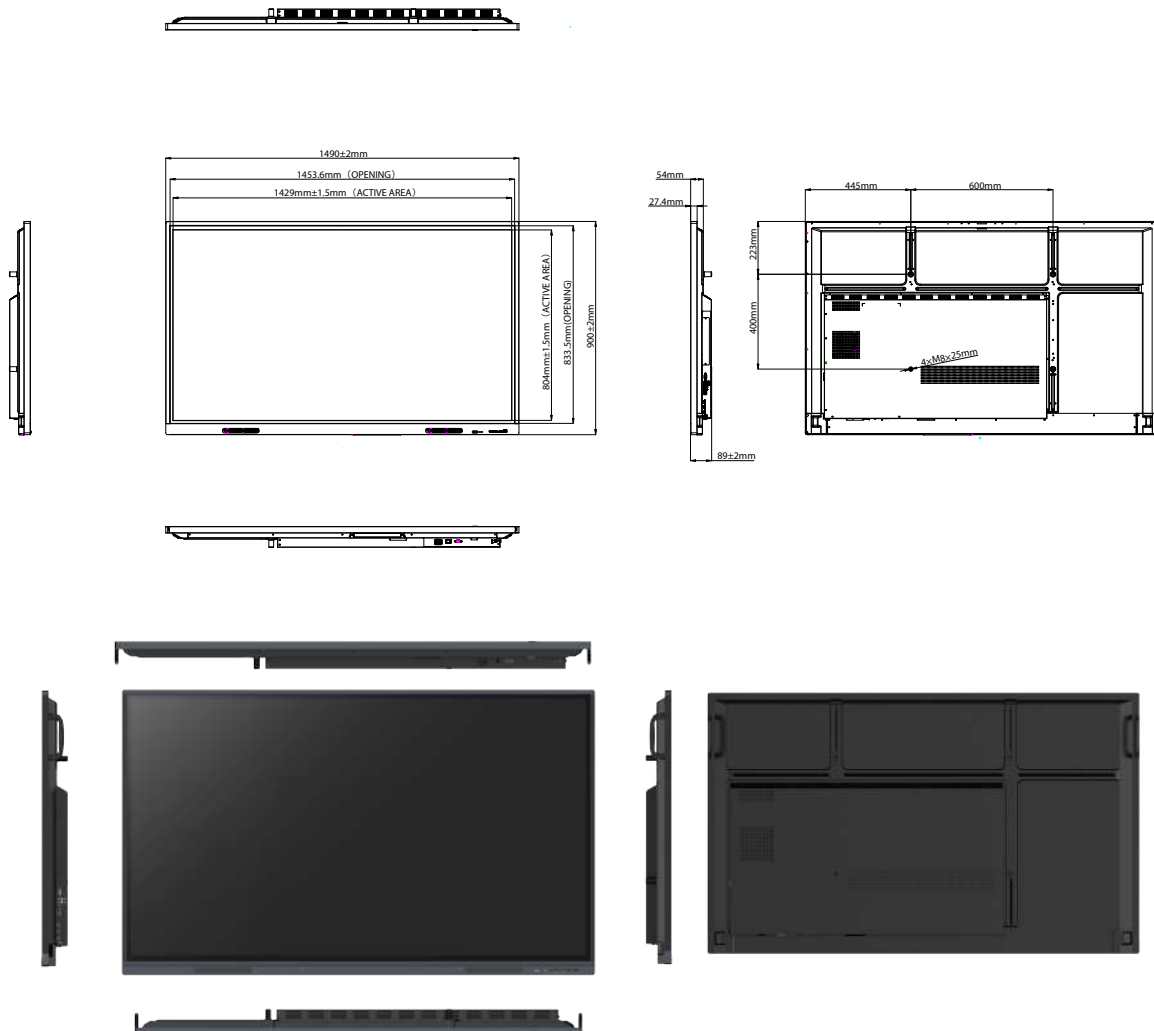

## Specifications 75

Dimension L×H×D	1709×1020×88mm
Dimension (package) L×W×H	1863×225×1114mm
Thickness of machine and wall mount	180mm (WIB9060G)
Wall-hanging Screw Spec	M8×25mm
VESA	800×600mm
Net Weight	47.30kg
Gross Weight	60.55kg

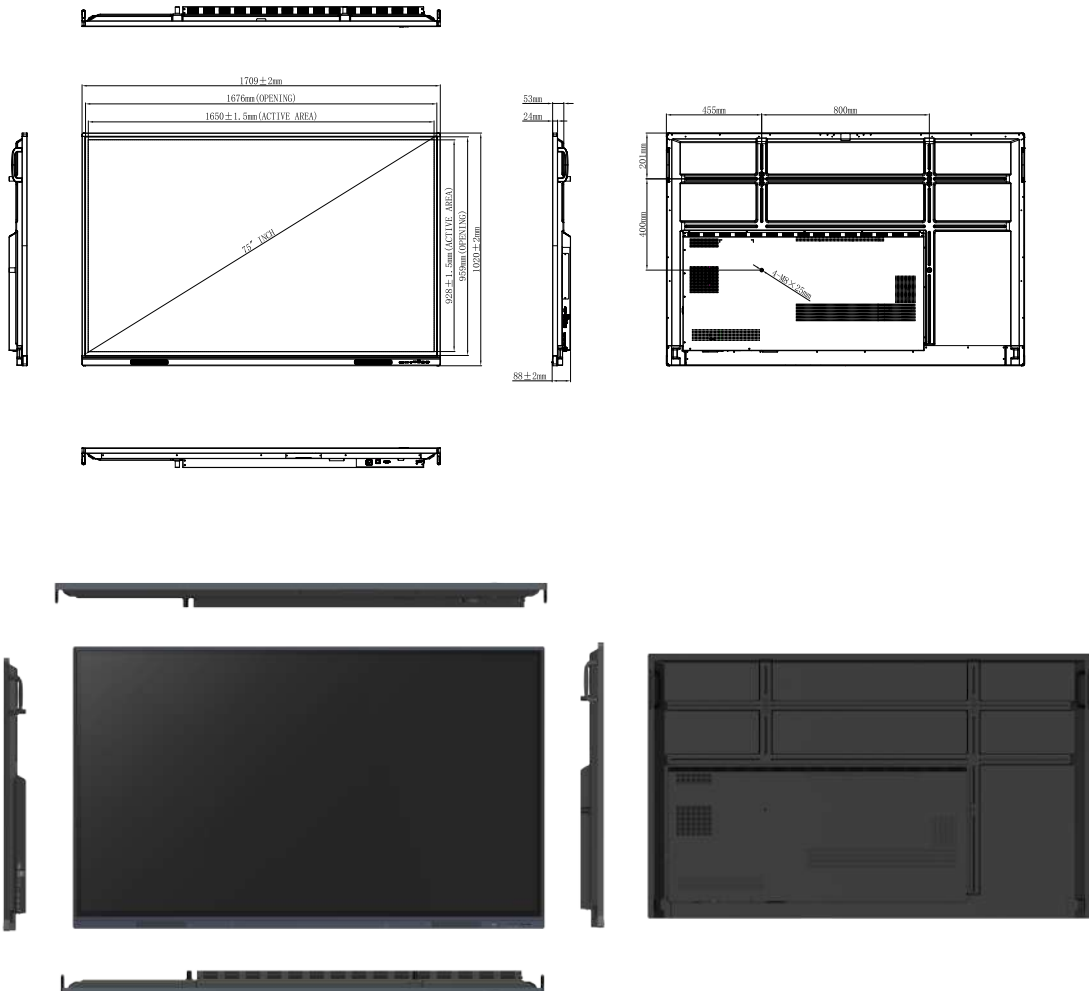

## Specifications 86

Dimension L×H×D	1957×1160×100mm
Dimension (package) L×W×H	2110×225×1283mm
Thickness of machine and wall mount	130mm (WIB9060G)
Wall-hanging Screw Spec	M8×25mm
VESA	800×600mm
Net Weight	58.55kg
Gross Weight	74.90kg

