

MODEL : **CE65GA**


ACCENT

SmartBoard


Imaginez, Créez, Développe et Formez
En toute simplicité



Dimension

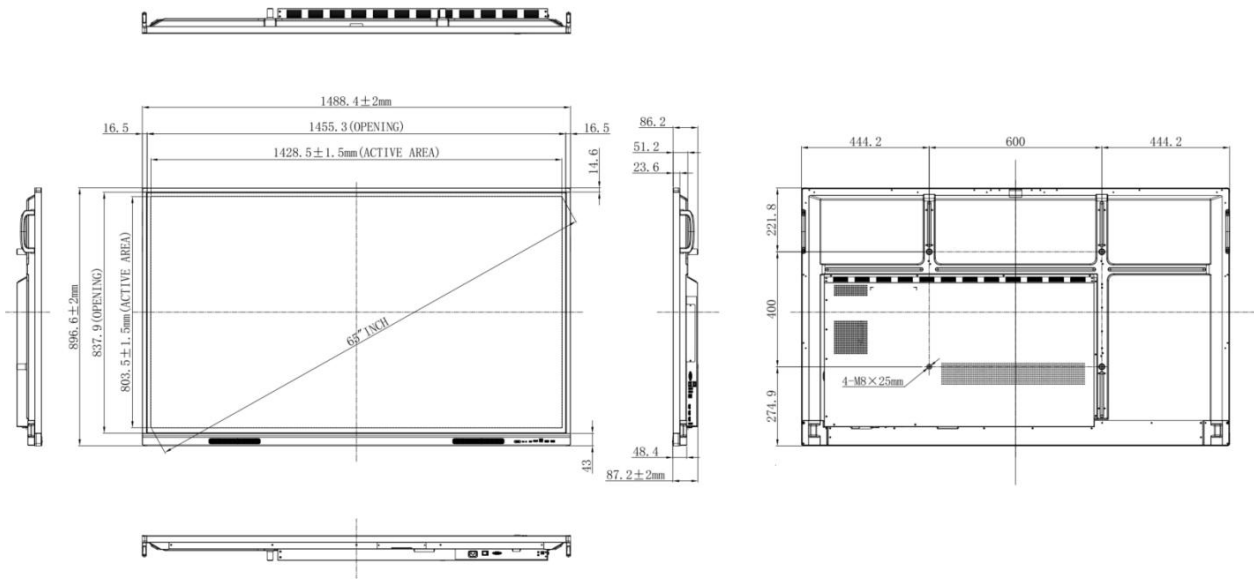

Specification

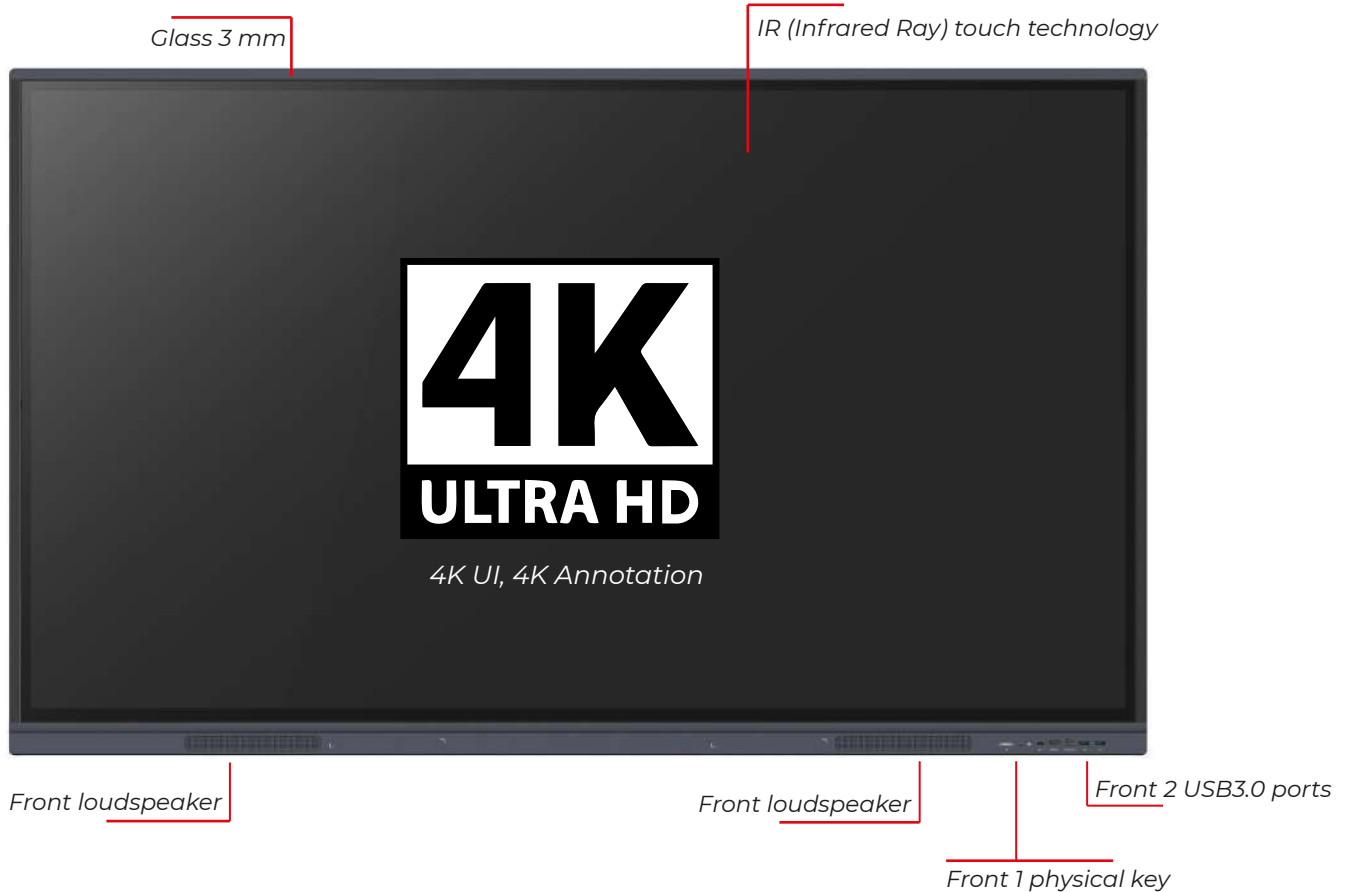

Display

Size	65inch
Panel Type	ADS
Response Time	6ms
Aspect Ratio	16:9
Display Area	1428.48(H)×803.52(V)mm
Pixel Pitch	0.372×0.372mm
Resolution	3840(H)×2160(V)
Refreshing Frequency	60Hz
Display Color	1.07B(10bit)
NTSC	72%
Contrast Ratio	1200:1
Viewing Angle	178°(H/V)
Back Light Unit	DLED
Brightness with glass(min)	300cd/m ²
Brightness with glass(typ)	350cd/m ²
Life Time	≥60000 Hours

Audio

Sound Channel	2.0
Speaker	2×16W
Sound pressure level	80dB
Peak power	54W

Power

Power Requirements	100-240V~50/60Hz 4.0A
Typical Power*[1]	200w
Max Power*[2] (W/OPS)	360w
Standby Power	≤0.5W

Operating System

System Version	Android 13.0
RAM	8G
ROM	64G
CPU	A55×4
GPU	Mali G52MP2

Touch System

Sensing Type	Infrared recognition
Touch Tool	Passive infrared pen
Accuracy	±1.5mm
Touch Point	40 points touch
Minimum object size	3mm
Writing Height	≤3mm
Interpolation Resolution	32768(W)×32768(D)
Response Time	≤10ms
System	Windows11/Windows10 Windows8/Windows7 WindowsXP/Android Linux/Mac OS X/Chrome

Accessories

Power Cord	×1
HDMI Cable	×1
USB Touch Cable (TypeA-B)	×1
Remote Control	×1
Writing Pen	×2
Fixation murale	×1

Physical Specifications

Dimension L×H×D	1488.4×896.6×87.2mm
Dimension (package) L×W×H	1628×208×1005mm
Thickness of machine and wall mount	116.5mm(WIB9060G)
Wall-hanging Screw Spec	M8×25mm
VESA	600×400mm
Net Weight	34.95kg
Gross Weight	44.70kg

Environmental Conditions

Operation Temperature	0°C~40°C
Operation Humidity	10%~90%RH
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

optional Module

PC Module	OPS62A
Wireless Module	Wifi6

other information

Size and weight vary by configuration and manufacturing process, please refer to the actual product.
The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.
The description, illustrations, etc.

in this document may subject to change in accordance with the latest product specification and performance.

Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

Notes:

*[1]: Without OPS, after the user menu is restored to the factory setting, it starts up without any setting and the port is not loaded.

*[2]: With OPS, OPS plays the color bar signal and runs the burning test. Port full load, user menu: Volume 100%, backlight 100%, brightness contrast 100%.

I/O Port

HDMI IN	3	Up to 4K@60Hz, HDCP 2.1, CEC, ARC(HDMI 1)
HDMI OUT(optional)	1	Up to 4K@60Hz
USB 2.0	1	For system upgrades
USB 3.0	4	Front×2, Rear×2 All USB 3.0 can auto switch to current channel
USB Type-C IN	1	Video, Audio, Touch, PD 65W, LAN Network Sharing
TOUCH 2.0	2	2.0
VGA IN	1	Up to 1080P@60Hz
AUDIO IN	1	3.5mm Phone Jack
AUDIO OUT	1	3.5mm Phone Jack
SPDIF	1	PCM output format
RS232	1	Baud rate 9600
RJ45 IN	1	10M/100M/1000Mbps
RJ45 OUT	1	10M/100M/1000Mbps